

UNIVERSAL

PLATFORM UNITS to create stages, podiums, catwalks and walkways for: Conference and Exhibitions Centres, Theatres, Concert Halls, Hotels, Shopping Centres and open-air concerts.

UNIVERSAL

Platforms units, adjustable in height, with manual leg lock (type 12) or foot release (type 13)

Size: 200 x 100 cm

Weight:

with foot leg lock: ca. 64 kg

with manual leg lock: ca. 60 kg

Load tested to: 750 kg/m².

Special dimensions and leg height upon request.

Sturdy frame with polyamide slides and notch stoppers enable an adjustment to the standard heights 15 (20) – 40 – 60 – 80 – 100 cm.

The platforms units can easily be inclined. The platforms units are closely packed (height 15 20 cm).

The steel parts are varnished silver-grey (two component synthetic paint).

The steel parts are stone grey powder coated. Floor covering (total with 21 mm) available:

FOR INDOOR USE

Blackboard with top veneer of beech wood, high-gloss finish,

Beech wood ply-wood, high-gloss finish,

Blockboard with ply-wood, high-gloss,

DD knot varnished,

Parquet flooring,

PVC-dance-surface,

Carpeting or synthetic flooring (PVC),

Tufted flooring,

Medium density fibre board,


Oak-wood laminate.

FOR OUTDOOR USE

Waterproof and weatherproof screen

print board (dark brown),

Metal gridding.

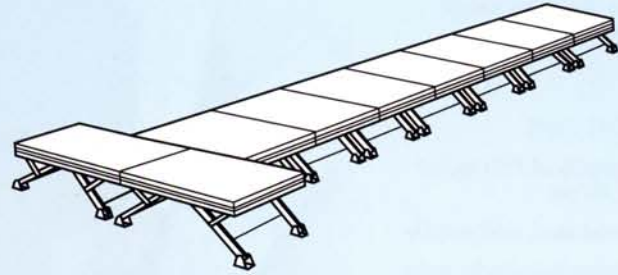

PORTABLE STAGE PLATFORMS with cross piece




UNIVERSAL with foot release and cross connection (nr. 13030)


UNIVERSAL with foot release (type 13)



Solid central support gives strength

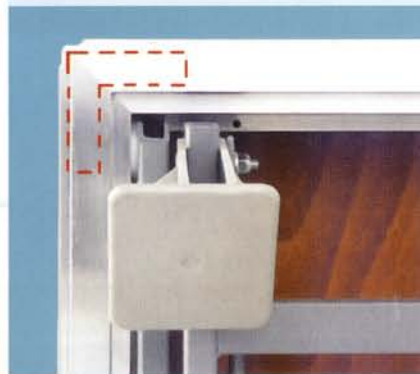

Reliable, the corner angle fitted inside

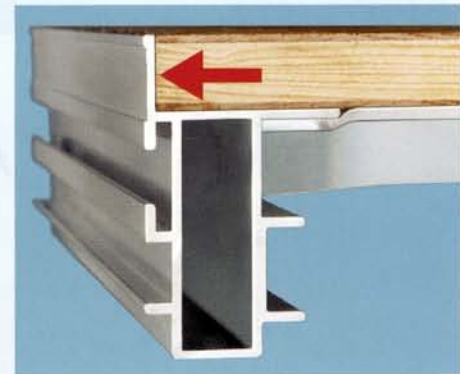

Profil edging for protection


QUALITY FEATURES

Strong but light ALU frame construction high point-load and vibration-load factor – possible by welded central support.


Compressed corner pieces eliminate torque edge protection for top surface keep joints tight and look good.

Accessories like stairs, safety hand-rails and facings are easily attached to continuous assembly rail.

Each platforms connects to its neighbour one with the X-junction parts – so tops are all level.

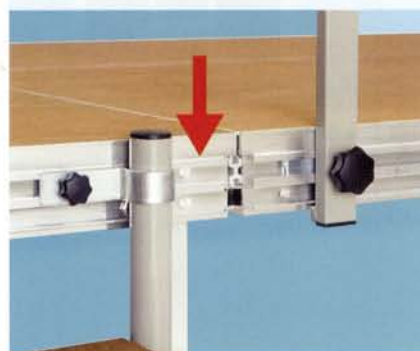

Clever – continuous assembly rail

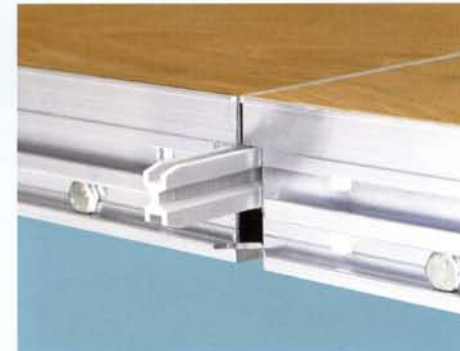

Added safety by the X-junction part

UNIVERSAL WITH FOOT RELEASE

specially comfortable, quick and easy the maintenance free

FOOT RELEASE WITH SAFETY BOLT

The units need not be turned for height adjustment when assembling or disassembling.

ADDITIONAL SUPPORT CLIPS

guarantee a load capacity of 750 kg/m² for a stage height of 40 cm.

Large plastic feet spread load, add stability and protect floor covering (suitable for point load and vibration load).


Plastic foot also in non-slip version available (nr. 13010).

UNIVERSAL with foot release with height adjustable foot up to 40 mm (nr. 13020).

UNIVERSAL with foot release and cross rail (nr. 13030). The plastic feet are rigidly joined together lengthways by a square cross rail (see front side).



Foot release with safety bolt

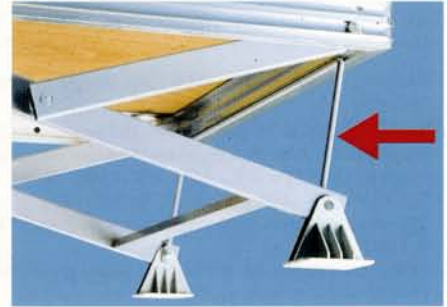

Support clip high 40 cm

UNIVERSAL WITH MANUAL LEG LOCK

Easy handling ensures quick adjustment of the platform units.

ADDITIONAL SUPPORT CLIPS

guarantee a load capacity of 750 kg/m² for a stage height of 40 cm.

Large plastic feet spread load, add stability and protect floor covering (suitable for point load and vibration load).

Plastic foot also in non-slip version available (nr. 12010).

UNIVERSAL with manual release adjustable up to 40 mm (nr. 12020).



Non-slip plastic foot (nr. 12010 und 13010)



Height adjustable foot (nr. 12020 und 13020)

ACCESSORIES

Z-angled connection clips for locking neighbouring legs together in stepped situations



Linking piece for tribunes as an added safety factor in semipermanent and/or high use situation



Steel clips as an added safety factor in semi-permanent and/or high use situations